


PRODUCT FEATURE


- H.265 / H.264
- 3DNR / Digital WDR / HLC / BLC / Digital Defog
- Support ROI coding
- Support smart phone, iPad, remote monitoring

SURVEILLANCE APPLICATION

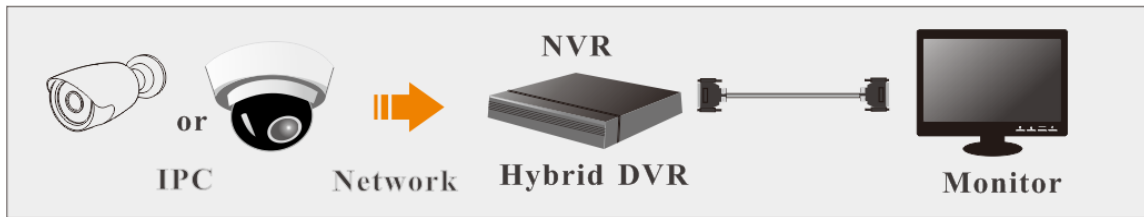

ACCESS THROUGH IPFINDER


Network connection:

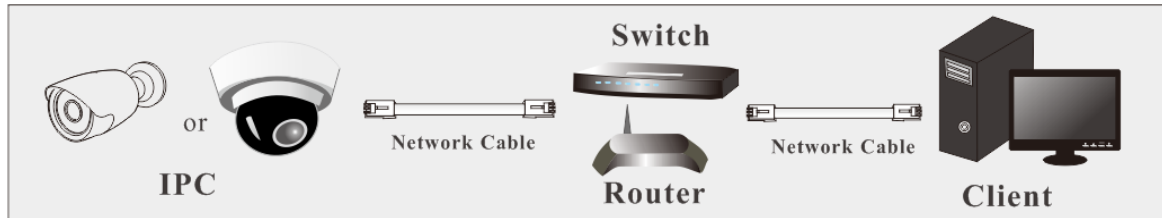

① Make sure the PC and IP-Cam are connected to the LAN and the IPFINDER is installed in the PC from the CD or HISHARP website.

② Double click the IPFINDER icon  on the desktop to run this software as

shown below:

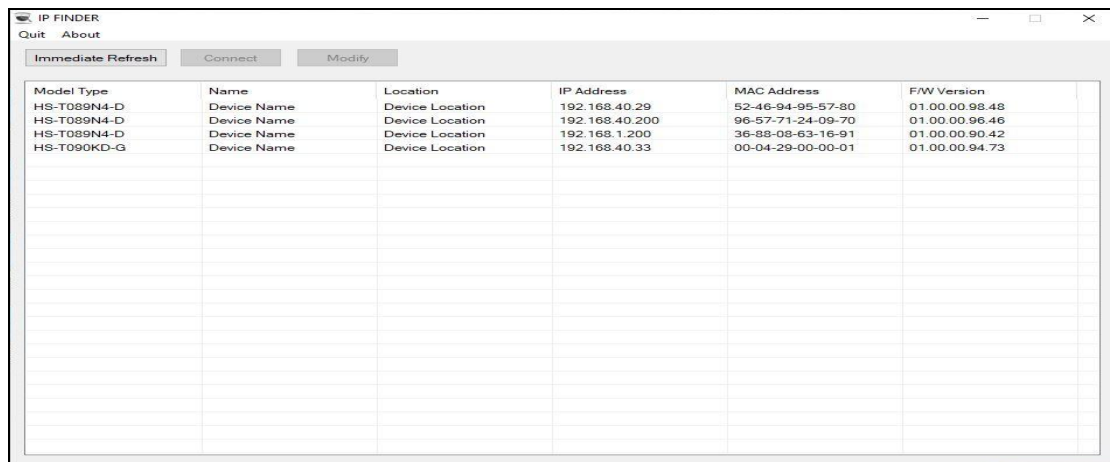

The screenshot shows a window titled "IP FINDER" with a menu bar (Quit, About) and three buttons: "Immediate Refresh", "Connect", and "Modify". Below the buttons is a table with the following data:

Model Type	Name	Location	IP Address	MAC Address	FW Version
HS-T089N4-D	Device Name	Device Location	192.168.40.29	52-46-94-95-57-80	01.00.00.98.48
HS-T089N4-D	Device Name	Device Location	192.168.40.200	96-57-71-24-09-70	01.00.00.96.46
HS-T089N4-D	Device Name	Device Location	192.168.1.200	36-88-08-63-16-91	01.00.00.90.42
HS-T090KD-G	Device Name	Device Location	192.168.40.33	00-04-29-00-00-01	01.00.00.94.73


Click 「 Immediate Refresh 」 to refresh IP address immediately.

Click 「 Connect 」 to connect IP address.

Click 「 Modify 」 to modify the IP address.

※ Please download IPCAM search tool “IPFINDEER” at HISHARP website.

③ Double click the IP address or click Connect 」 and then the system will pop up the browser to connect IPCAM through Chrome or Edge.

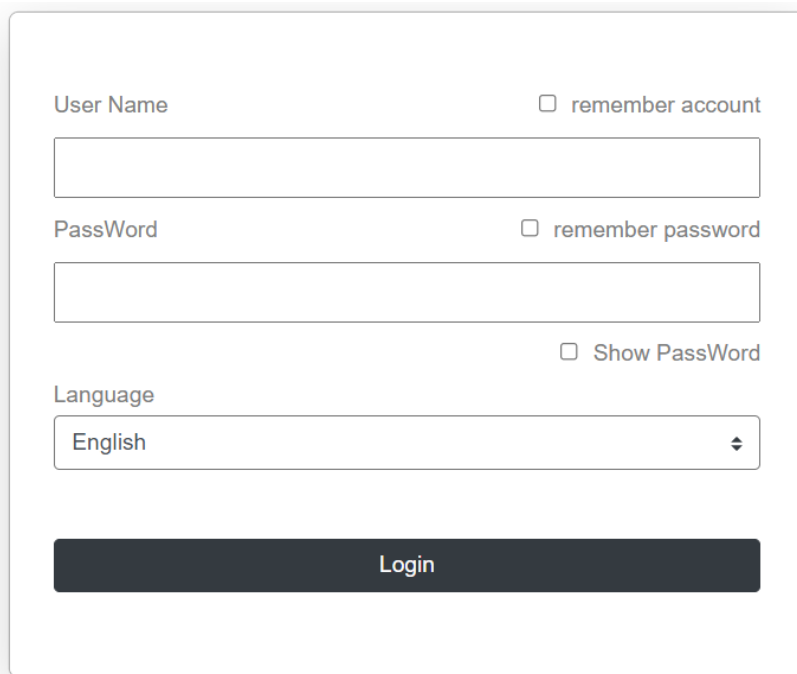

The login form contains the following fields and options:

- User Name: remember account
- PassWord: remember password
- Show PassWord
- Language:
- Login button

Input the username and password to log in.

☞ The default username is “**admin**”; the default password is “**admin**”.

After log in for the first time, you can modify default password.

Modify default password ✕

Keep the original factory default account password and no longer display

Not showing for 24 hours

change Password

User Name

New Password Show PassWord

Confirm Password Show PassWord


weak middle Strong

8-16 characters; must include numbers, uppercase and lowercase letters.

Save

Remote Preview Interface

After you log in, you will see the following window.

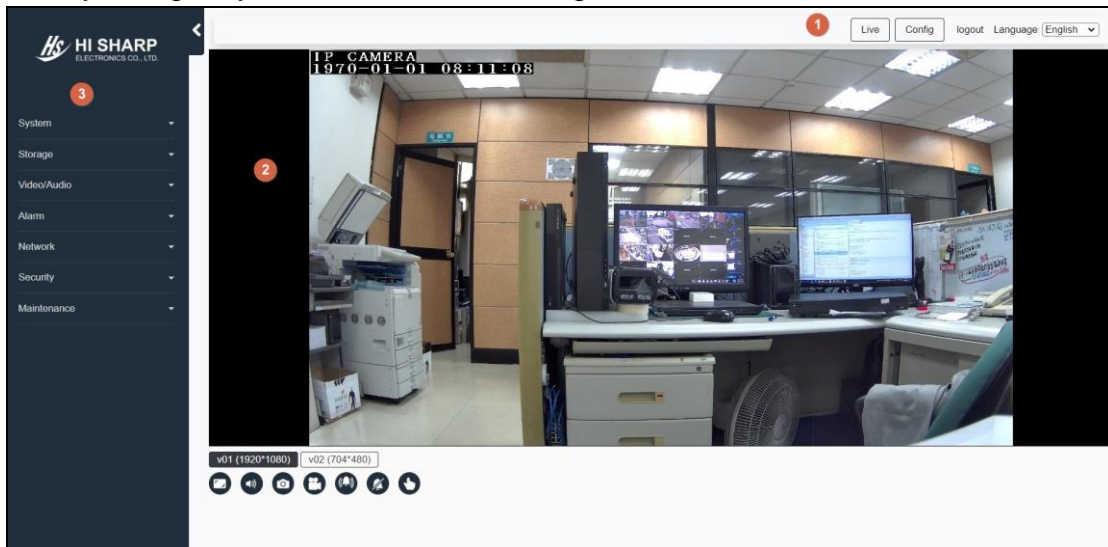

Introduction of area ① :










Item	Description
Live	Remote live preview
Config	Basic information
Logout	Logout the interface
Language	Chinese 、 English 、 Japanese 、 Spanish 、 Arabic

Area ② is refer to remote live preview.

Introduction of area ③ :

Item	Description
System	Basic information and Date time setting.
Storage	Storage information and File list setting.
Video/Audio	Camera · Video · Audio · OSD · Privacy mask · Exposure area and ROI setting.
Intelligent	Smart (Line crossing & Scene)
Alarm	Motion detection · Alarm server and Event setting.
Network	TCP/IP · Advanced and Wireless network setting.
Security	User and Streaming online list setting.
Maintenance	Backup and Restore · Reboot · Upgrade · Operation Log and System log.

The buttons in area ④ are introduced in the table below.

Icon	Description	Icon	Description
	Main stream		Download record file.
	Sub stream		Turn on the alarm.
	Full screen. In full screen mode, double click to exit.		Turn off the alarm.
	On/OFF Audio.		Manual trigger.
	Snap.		

※The browser is only available 1080p or less resolution. If video resolution is 2560*1440, the user can only choose v02.

※Video/Audio-Video-Resolution

Hi SHARP ELECTRONICS CO., LTD.

System
Storage
Video/Audio
Camera
Video
Audio
OSD
Privacy Mask
Exposure Area
ROI
Intelligent
Alarm
Network
Security

Live Config logout Language English

T101KV 487 121
2023-07-03 14:38:32

V02 (704'480)

Icons: Microphone, Camera, Settings, Volume, Mute, Hand cursor