


## Hybrid DVR HS-HK3382

### Product Features

- QR CODE P2P connection
- Time slice instant search
- One click back up
- FTP cloud back up
- Private DDNS service
- Push notification
- NVR remote recording
- RTSP streaming
- IP camera recording
- NVMS-1000 management
- HI SHARP APP



### Dimension (mm)

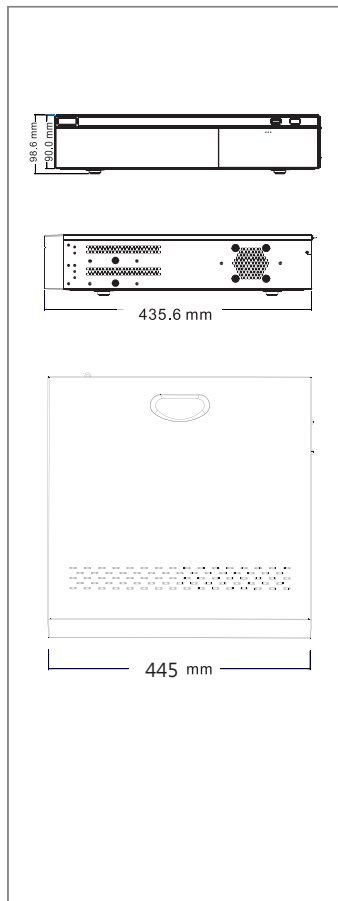

### Specifications

Model		HS-HK3382
Input	AHD/TVI/CVI	32CH
	Max IPC Connection	24CH (16+8)
	Total Connection	40CH
Output	HDMI	1920x1080 / 1280x1024 / 1024x768
	VGA	1920x1080 / 1280x1024 / 1024x768
	CVBS	Main / Spot
Compression Method		H.265 High Profile
Display Channel		1 / 4 / 9 / 16 / 25 / 32
IPC Connection		5MP / 4MP / 3MP / 1080P / 960P / 720P (Automatically adjustment by DVR)
Recording Resolution (HD Analog)	5MP	-
	5MPL	320 fps
	4MP	-
	4MPL	384 (PAL)/480 (NTSC)
	1080P	384 (PAL)/480 (NTSC)
Recording Resolution (IP)	720P / 960H / 1080L	800 (PAL)/960 (NTSC)
	Resolution	5MP / 4MP / 3MP / 1080P / 960P / 720P
	Recording Rate	25 (PAL) / 30 (NTSC) fps per channel
Simultaneously Local Playback		16CH
Recording Mode		Auto / Manual / Schedule / Motion / Alarm
Record Quality		Highest / Higher / Medium / Lower / Lowest
Playback Mode		Date & Time search / Event search
Multi-task		Live / Record / Play / Network / Backup
Motion Detect		22 x 18 grids camera for all channel
Audio		16 input, 1 output
Alarm		16 input, 4 output
Storage		SATA x 8 (Support 10TB each)
Backup		USB 3.0 / USB 2.0 / Network remote backup
E-SATA		1
PTZ Control		PELCO-P, PELCO-D, CoC (UTC)
Mobile Surveillance		Iphone / Ipad / Android
Ethernet		10 / 100 / 1000 M Base-T
Network-Function		CMS / APP / IE
Network Connection		TCP / IP, PPPoE, DHCP, DDNS (Auto DDNS)
Client Application		Display / Playback / Backup / DVR control / PTZ control
Power Source		AC100V ~ 230V
Operating Temperature		5° C ~ 40° C (41° F ~ 104° F)
Operating Humidity		Less than 90%
Dimension		445 x 435.6 x 98.6 ( W × D × H ) mm