


# Standard PoE Switch HS-PSW402-B

## Product Features

- Total 60W power supply
- 4 ports POE
- 2 ports Uplink
- Support surge protection for both power and RJ45 ports
- Power supply supports overloaded and over temperature protection
- Separate PoE and DC circuit, reduce interference



## Dimension (mm)

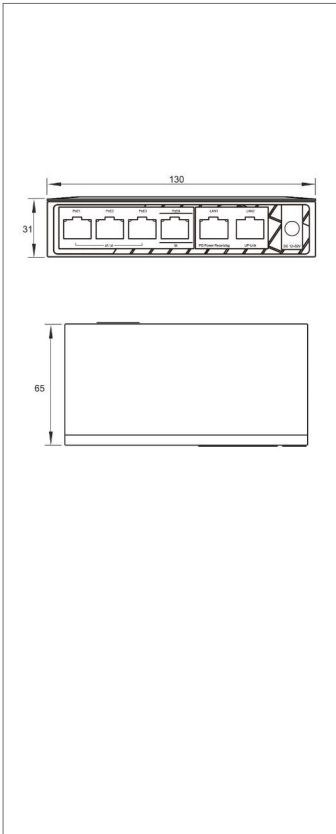

## Specifications

Model	HS-PSW402-B	
Ethernet Port	PoE	RJ-45 x 4, 10/100 Mbps
	Uplink	RJ-45 x 2, 10/100 Mbps
PoE Consumption	Port 1,2,3 ≤ 30W	
	Port 4 ≤ 60W	
	Total Consumption ≤ 60W	
PoE Power Management	YES (Auto)	
PoE Pin Define	PoE 1~3 port : 12 (+), 36 (GND) PoE 4 port : 1245 (+), 3678 (GND)	
PoE Standard	IEEE 802.3i, IEEE 802.3u, IEEE802.3x, IEEE802.3at/af/bt	
Backplane Bandwidth	1.2 Gbps	
PoE Watchdog	Port 1-4	
Packet Buffer Memory	-	
MAC Table Size	2K	
Flow Control	YES ( Auto )	
Power Supply	DC 12V ~ 52V	
Transmission Distance	10Mbps / 250M 100Mbps / 100M	
Operating Temperature	-10°C ~ 55°C ( -14° F~131° F)	
Operating Humidity	10% ~ 90%	
Lightning Protection	General Mode 6KV	
ESD Protection	8KV	
Weight	0.28kg	
Dimension(W × D × H)	130 x 65 x 31 mm	