

# Standard PoE Switch HS-PSW802-B


## Product Features

- Total 120W power supply
- 8 ports POE
- 2 ports Uplink
- 1 port SFP
- Support surge protection for both power and RJ45 ports
- Power supply supports overloaded and over temperature protection
- Separate POE and DC circuit, reduce interference

## Specifications



### Dimension (mm)

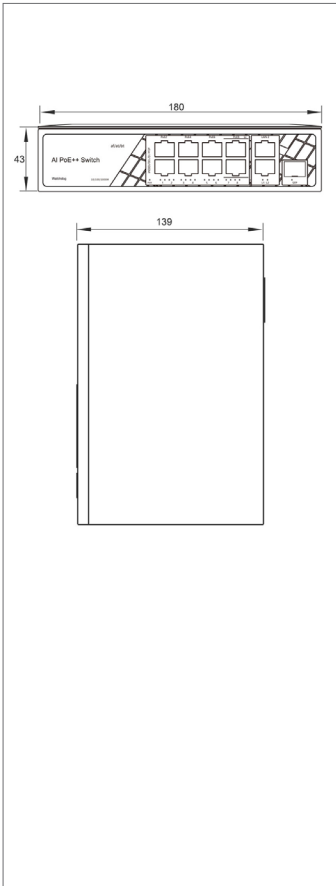

Model	HS-PSW802-B	
Ethernet Port	PoE	RJ-45 x 6, 10/100 Mbps RJ-45 x 2, 10/100/1000 Mbps
	Uplink	RJ-45 x 2, 10/100/1000 Mbps
	SFP	1, 1000 Mbps
PoE Consumption	Port 1~6 ≤ 30W	
	Port 7,8 ≤ 60W	
	Total Consumption ≤ 120W	
PoE Power Management	YES (Auto)	
PoE Pin Define	PoE 1~6 port : 12 (+), 36 (GND) PoE 7~8 port : 1245 (+), 3678 (GND)	
PoE Standard	IEEE 802.3i, IEEE 802.3u, IEEE802.3ab, IEEE802.3x, IEEE802.3at/af/bt	
Backplane Bandwidth	11.2 Gbps	
PoE Watchdog	Port 1-8	
Packet Buffer Memory	-	
MAC Table Size	8K	
Flow Control	YES ( Auto )	
Transmission Distance	10Mbps / 250M 100mbps / 130M	
Power Supply	AC 110~220V	
Operating Temperature	-10° C ~ 55° C ( -14° F~131° F)	
Operating Humidity	10% ~ 90%	
Lightning Protection	General Mode 6KV	
ESD Protection	8KV	
Weight	1.04kg	
Dimension(W × D × H)	180 x 139 x 43 mm	