





IP CAMERA

HS-D058TE-D

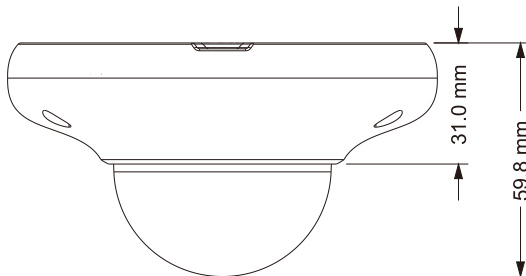

- Smart H.265+ / H.265 / H.264+ / H.264 / MJPEG
- 5MP (2592 × 1944)
- 10 ~ 20 M IR night view distance
- 3 DNR, TWDR, HLC, BLC, Digital Defog, Smart IR, Image Distortion Correction
- ICR auto switch, true day / night
- Built-in micro SD card slot, up to 256GB
- Support ROI coding
- Support three streams
- IP66 ingress protection
- Intelligent analytics: abnormal video signal detection, line crossing detection, region intrusion detection, face detection, face capture


RoHS CE FC



| Camera | |
|----------------------------|---|
| Image Sensor | 1/ 2.7" CMOS |
| Image Size | 2592 × 1944 |
| Electronic Shutter | 1 s ~ 1 / 100,000 s |
| Min. Illumination | 0.02 lux@F1.6,AGC ON; 0 lux with IR 0.007 lux@F1.2,AGC ON; 0 lux with IR |
| Lens | Board 2.8 mm @F1.6 |
| FOV | Horizontal: 98.5° ; Vertical: 82.1° ; Diagonal:110.9° |
| IR Distance | 10 ~ 20 M |
| WDR | 120dB |
| Day & Night | ICR auto switch |
| BLC | YES |
| HLC | YES |
| Digital Defog | YES |
| Digital DNR | 3 DNR |
| Image | |
| Video Compression | H.265+ / H.265 / H.264+ / H.264 / MJPEG |
| H.264 Compression Standard | Baseline Profile / Main Profile / High Profile |
| Resolution | 5MP (2592 × 1944), 4MP (2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240 |
| Main Stream (S1) | 5MP / 4MP / 2K / 3MP / 1080P / 720P @30fps HFR mode: 1080P / 720P @60fps |
| Sub Stream (S2) | 720P / D1 / CIF @30fps |
| Third Stream (S3) | D1 / CIF / 480 x 240 @30fps |
| Bit Rate | 64 Kbps ~ 8 Mbps |
| Bit Rate Type | VBR / CBR |
| Image Settings | ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic,Sharpen, NR,etc. adjustable through client software or web browser |
| ROI | Each ROI to be configured separately |
| Audio | |
| Audio Compression | G.711A / U |
| Two-way audio | - |
| Interfaces | |
| Network | RJ45 |
| Video Output | - |
| Audio line in | 1CH audio input; Built-in MIC× 1 |
| Audio line out | - |
| Alarm Input | - |
| Alarm Output | - |
| Storage | |
| SD card | Built-in micro SD card slot; up to 256GB |
| Network remote storage | YES |
| Hardware Reset | YES |



HS-D058TE-D

| Intelligent Analytics (Smart Events) | |
|---|--|
| Perimeter Protection | Line crossing, region entrance/exiting/intrusion (human/motor vehicle/ non-motor vehicle classification) |
| Target Counting | Line crossing human/motor vehicle/non-motor vehicle counting |
| Exception Detection | Scene change, video blur and video color cast detection |
| Face Detection | Face detection and face capture |
| Functions | |
| Remote Monitoring | Web browsing,CMS remote control |
| Online Connection | Support simultaneous monitoring for up to 10 users Support multi-stream real time transmission |
| Network Protocol | UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, ICMP, IGMP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, 802.1x, UPnP, HTTPs, QoS |
| Interface Protocol | ONVIF |
| Smart Alarm | Motion detection, SD card error, SD card full |
| General function | Watermark, IP address filtering, video mask, heartbeat, password protection, image distortion correction |
| PoE | Yes, IEEE802.3af |
| Others | |
| Power Supply | DC12V/ PoE |
| Power Consumption | < 6W |
| Operating Environment | - 30 °C ~ 60 °C (-22° F~140° F) Humidity: less than 95 % (non-condensing) |
| Dimensions | Ø110 x 59.8 mm |
| Weight | Approx. 380g |
| Installation | Ceiling mounting ,wall mounting |
| Ingress Protection | IP66 |
| Accessories | |
|  B609 | |