




## IP CAMERA

# HS-T058WM

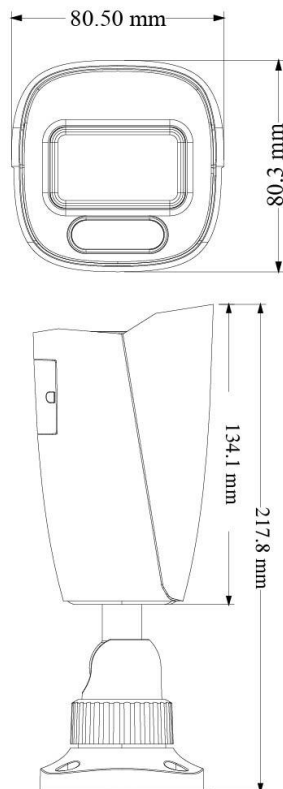

- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- 4MP (2688 × 1520)
- 20~30m white light view distance
- 3D DNR, WDR, HLC, BLC, and ROI coding
- Support electronic image stabilization(EIS)
- Built-in micro SD card slot, up to 1TB
- Support 1CH audio input; 1CH audio output; 1 CH built-in MIC
- IP67 ingress protection
- Support three streams
- Support P2P function
- DC12V/PoE power supply
- Support dual-system backup
- Multiple smart events can be enabled at the same time.



# HS-T058WM

| Camera                     |   |
|----------------------------|---|
| Image Sensor               | 1 / 1.79 " CMOS   |
| Image Size                 | 2688x 1520  |
| Electronic Shutter         | 1 / 3 s ~ 1 / 100,000 s   |
| Min. Illumination          | 0.0001 lux @F1.0, AGC ON<br>0 lux with illuminate on  |
| Lens                       | Board 2.8mm @F1.0   |
| View Angle                 | Horizontal : 112°<br>Vertical : 61°<br>Diagonal : 132°  |
| White Light Distance       | 20~30m  |
| WDR                        | 120 dB  |
| BLC                        | YES   |
| HLC                        | YES   |
| Defog                      | YES   |
| S/N Ratio                  | ≥50dB   |
| Digital NR                 | 3D DNR  |
| EIS                        | YES   |
| Angle Adjustment           | Pan: 0°~360°; Tilt:0°~90°;Rotation: 0°~360°   |
| Image                      |   |
| Video Compression          | Main stream : H.265+ / H.265 / H.264+ / H.264<br>Sub / Third stream :<br>H.265+ / H.265 / H.264+ / H.264 / MJPEG  |
| H.264 Compression Standard | Baseline Profile / Main Profile / High Profile  |
| Resolution                 | 4MP(2688x1520), 2K(2560x1440), 1080P(1920x1080), 720P(1280x720), D1, VGA(640x480), 640x360, 480x240, CIF  |
| Main Stream (S1)           | 4MP / 2K / 1080P<br>(60Hz:1~30fps ; 50Hz:1~25fps)   |
| Su Stream (S2)             | 1080P / 720P / D1 / 640x360<br>(60Hz:1~30fps;50Hz:1~25fps)  |
| Third Stream (S3)          | 720P / D1 / 640x360 / VGA / 480x 240 / CIF<br>(60Hz:1~30fps;50Hz:1~25fps)   |
| Bit Rate                   | 32 Kbps ~ 8 Mbps  |
| Bit Rate Type              | VBR / CBR   |
| Image Settings             | ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. (adjustable through client software or web browser) |

| ROI                   | YES   |            |            |           |
|-----------------------|---|------------|------------|-----------|
| Audio                 |   |            |            |           |
| Audio Compression     | G.711 AU  |            |            |           |
| Audio in              | 1 CH audio input ; 1 CH Built-in MIC  |            |            |           |
| Audio out             | 1 CH audio output   |            |            |           |
| Interfaces            |   |            |            |           |
| Network               | RJ45  |            |            |           |
| Alarm Input           | 1 CH alarm input  |            |            |           |
| Alarm Output          | 1 CH alarm output   |            |            |           |
| Storage               | Built-in micro SD card slot; up to 1TB  |            |            |           |
| Reset                 | Yes   |            |            |           |
| Functions             |   |            |            |           |
| Remote Monitoring     | Web browser / NVR / NVMS2.0 / APP   |            |            |           |
| Web Browser           | Chrome92.0+/Edge92.0+/Firefox91.0+/<br>Safari13.1+  |            |            |           |
| Online Connection     | Live View for up to 10 clients  |            |            |           |
| Network Protocol      | UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, HTTP POST, P2P, QoS   |            |            |           |
| Interface Protocol    | ONVIF   |            |            |           |
| Smart Alarm           | Motion detection, SMD, SD card error, SD card full, IP address conflict, network disconnection, sensor alarm, audio alarm   |            |            |           |
| General function      | Watermark, video mask, heartbeat, image distortion correction, ANR, cloud upgrade, disarming, corridor pattern  |            |            |           |
| Security              | Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP |            |            |           |
| PoE                   | YES ( IEEE802.3af )   |            |            |           |
| Intelligent Analytics |   |            |            |           |
| Smart Event           | Line crossing/region intrusion/entrance/exiting (human/vehicle classification), Video Metadata, abandoned/missing object detection, loitering detection, illegal parking detection                |            |            |           |
| Statistics            | Target counting by line/area, heat map  |            |            |           |
| Exception Detection   | Scene change, video blur and abnormal color detection   |            |            |           |
| Face Detection        | Face detection, face capture and face comparison  |            |            |           |
| Others                |   |            |            |           |
| Power Supply          | DC 12V / PoE  |            |            |           |
| Power Consumption     | < 7W  |            |            |           |
| Operating Environment | - 10 ° C ~ 50 ° C ( 14° F ~ 122° F )<br>Humidity: less than 85 % (non-condensing)   |            |            |           |
| Dimensions            | 217.8 × 80.5 x 80.3 mm  |            |            |           |
| Weight                | Approx. 690g  |            |            |           |
| Ingress Protection    | IP67  |            |            |           |
| DORI Distance         |   |            |            |           |
| Lens                  | Detect  | Observe    | Recognize  | Identify  |
| 2.8mm                 | 52m(170 ft)   | 21m(68 ft) | 10m(33 ft) | 5m(17 ft) |